

MC 5054

UNIVERSAL HIGH QUALITY MICROPHONE

DESCRIPTION

MC 5054 is a condenser microphone with high quality capsule, mounted on a flexible arm 445 mm long, and to be installed on microphone support with XLR connector. It is powered with phantom from 9 V to 52 V and windshield polyurethane foam. It has a LED ring on microphone-head and the MAX SPL the capsule can withstand is 140 dB.



FEATURES

- Electret condenser microphone
- Unidirectional, cardioid polar diagram
- Frequency response 50 Hz - 18.000 Hz
- Max input SPL 140 dB
- Output impedance 200 Ohm
- Phantom power 9V ~ 52V DC
- LED ring on microphone-head
- Windscreen included

TECHNICAL SPECIFICATIONS**Microphone specifications**

Type:	Electret
Directivity:	Cardioid
Sensitivity:	-65 dB
Frequency Response (-3dB):	50 Hz ÷ 18 kHz
Output impedance (ohm):	200.00 ohm
Phantom power:	Yes
Phantom Power:	9 V DC - 52 V DC

Standard compliance

CE marking:	Yes
-------------	-----

Physical specifications

Cabinet/Case Material:	Metal
Color:	Black

Size

Height:	540 mm / 21.26 inches
Diameter:	21 mm / 0.83 inches

Shipping informations

Package Height:	55 mm / 2.17 inches
Package Width:	540 mm / 21.26 inches
Package Depth:	45 mm / 1.77 inches
Package Weight:	0.26 kg / 0.57 lbs


PART NUMBER

- **14115024**

MC 5054

EAN 8024530012007

DRAWINGS

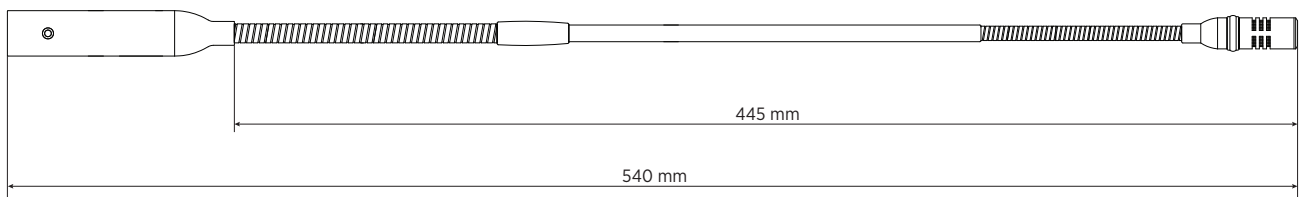

FREQUENCY RESPONSE

